



Deutsche Power

# XL-PLUS SERIES

LINE INTERACTIVE UPS

650VA ~ 3000VA (1/1)

 SOHO &  
I.T Grade UPS

# LINE INTERACTIVE UPS

## XL-PLUS Series (650VA~3000VA)

XL-PLUS Series, a Line-Interactive UPS is designed for user's required short backup with high reliability, durability and economical solution. Ideally for SOHO applications and many other applications of similar types.

### Technology

XL-PLUS uses line interactive technology to produce a basic level of protection. This topology includes a transformer in series between the utility power source and the load, enabling the UPS to "interact" with the mains.

### LCD

XL-PLUS has LCD in its front panel for easily viewing of different features directly from the UPS LCD. This LCD displays input /output voltages, input/output frequency, battery capacity, faults and many others features can be viewed.

### Remote Management

XL-PLUS status information can be accessed securely from any computer on your IP-Based network. UPS history log, input /output voltages, input/output frequency, battery capacity, faults and many others feature can be view remotely.

### Compact Design

XL-PLUS compact design makes this UPS different from other similar Products. Its reduced dimensions is easily integrated into offices environment and low space areas.

### Off Mode Charging

XL-PLUS has the ability to do off mode charging which means UPS can be insert for charging while powering off the on/off button. This feature provide the leverage to charge the UPS in non working hours while keeping the load off.

### Cold Start

XL-PLUS is empowered with cold start function which enable the UPS to start directly on its batteries without providing the mains supply.



### Wide Input Voltage Range AVR with Buck & Boost


XL-PLUS wide input range 140~300VAC for 650/1000VA and 162~290VAC for 2000VA make it suitable to use in the areas where voltages fluctuation is a serious problem. The UPS automatically Buck & Boost as per input feedback.

### Standards

Security:	CH0054132-2000,
Conductive Disturbance:	GB9254 1998/EN55022
	CLASS B
Video Frequency Disturbance:	GB9254 1998/
	EN55022 CLASS A

### Application

Work Stations  
Computer Peripherals  
Point of Sale Equipment  
Hubs, Routers

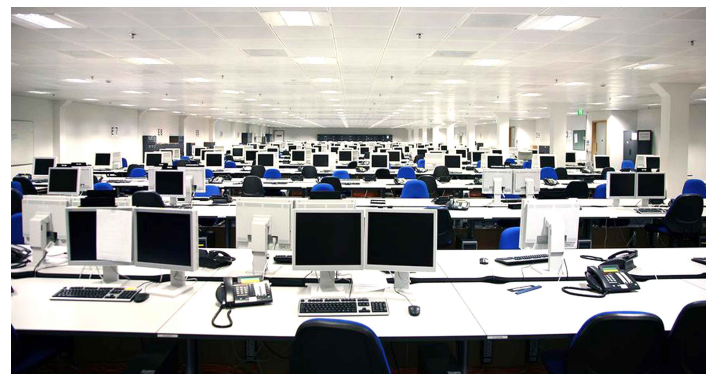

# LINE INTERACTIVE UPS

## TECHNICAL SPECIFICATION FOR XL-PLUS SERIES

### MODEL

Rating	XL-650	XL-800	XL-1000	XL-1200	XL-1500	XL-2000	XL-3000
VA	650	800	1000	1200	1500	2000	3000

### INPUT

Phase	110/120 VAC or 220/230/240 VAC
Voltage Range (Buck & Boost AVR)	81-145 VAC / 162-290 VAC
Frequency Range	60/50 Hz (Auto sensing)

### OUTPUT

Output Voltage	110/120 VAC or 220/230/240 VAC
Power Factor	0.6 (standard), 0.7 & 0.8 Available on request
AC voltage Regulation	± 10%
Frequency Range	60 Hz or 50 Hz ± 1 Hz
Transfer Time	Typicle 2-6 ms
Waveform (Batt. Mode)	Simulated Semi Sinewave Pure Sinewave

### BATTERY

Battery Type & Number	12V/7Ah-9Ahx1	12V/7Ah-9Ahx2	12V/9Ahx2	12V/7Ahx6
Typical Recharge Time	4-6 hours recover to 90% capacity			

### PROTECTION

Full Protection	Surge, overload, discharge and overcharge protection
-----------------	--

### INDICATORS

LED / LCD Display LCD Display (optional)	AC Mode, Battery Mode, Load Level, Battery Level, Input Voltage, Output Voltage Overload, Fault, and Low Battery
---	--

### PHYSICAL

Dimension	287x100x142		397 x 146 x 205		495 x 150 x 250	
Net Weight (kgs)	4.25	4.75	11.1		11.5	24.8

### ENVIRONMENT

Humidity	0-90% RH @ 0-40 C (Non-condensing)
Noise Level	Less then 40db

### MANAGEMENT

Communication	USB/RS-232 Port (optional)
---------------	----------------------------

DP Electronics (Deutsche Power Co. Limited) has a policy of continuous product development and improvement and therefore reserve the right to vary any information without prior notes.

# DP ELECTRONICS (DEUTSCHE POWER CO., LIMITED)



## Germany Head Office

DP electronics (Deutsche Power Co., Limited) Klon, Germany.  
Phone: +49-221-26016266  
Fax: +49-221-26016267  
Email: [enquiries@deutschepower.de](mailto:enquiries@deutschepower.de)

## Hong Kong Office

RM 1701(057), 17/F, HeNan Building No90, Wan Chai, Hong Kong.  
Phone: +86-755-82610239  
Fax: +86-755-82610233  
[helenlong@deutschepower.de](mailto:helenlong@deutschepower.de)